


OPTION CODES


ELECTRICAL SPECIFICATIONS	
SUPPLY	OUTPUT
A 5V ±1V	0.5 TO 4.5V RATIO METRIC
C 13 TO 28V	0.5 TO 9.5V
D ±15V NOM. (±13 TO 28V)	±10V
SUPPLY CURRENT 20mA MAX.	
E 18 TO 28V	4 TO 20mA 2-WIRE
F 13 TO 28V	4 TO 20mA 3-WIRE SINK
H 13 TO 28V	4 TO 20mA 3-WIRE SOURCE
SINK VERSION OUTPUT COMPLIANCE 5-28V	
SOURCE VERSION DRIVE 300 OHMS MAX TO 0V	

OPTION 'W' FLANGE ILLUSTRATED; SEE TG24-11 FOR DETAILS TO SPECIFY TARGET TUBES.
SEE P100-12 FOR DETAILS TYPICAL TARGET TUBE MOUNTING ARRANGEMENTS

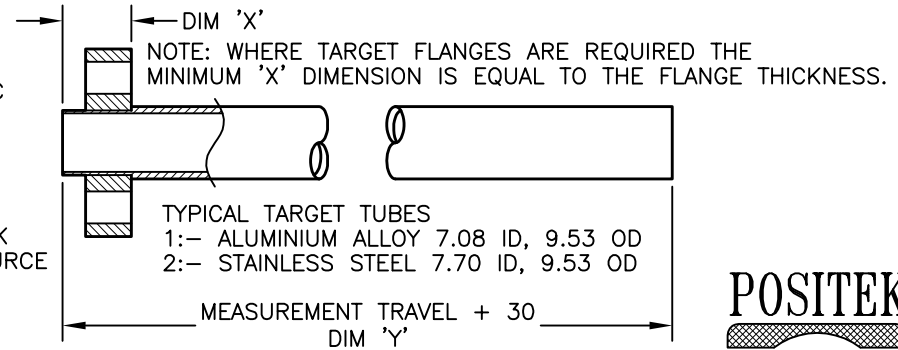

J	MOUNTING BOSS DIMS CORRECTED	PDM

DRAWINGS NOT TO BE CHANGED WITHOUT REFERENCE TO THE CHANGE PROCEDURE.
CHANGES TO PARTS USED IN INTRINSICALLY SAFE PRODUCT MUST BE APPROVED
BY THE AUTHORISED PERSON
THIS IS AN UNCONTROLLED PRINT AND WILL NOT BE UPDATED.



J	06/07/05		CHECKED BY	X ±0.4
			RDS	X.X ±0.2 X.XX ±0.1 DIMS mm
		DESCRIPTION		
		P100 LIPS		
		CYLINDER POSITION SENSOR		
SCALE	DRAWING NUMBER	P100-11	REV	J
10mm				
				SHEET 1 OF 1